


## DMX-R100 Application Software Installation Guide



1. You can obtain application software on floppy disk from your Sony representative, or you can download it from the web site onto a formatted floppy disk.
2. Check you have the correct files ( R100Vxxx.F and UPDATER.F )



3. Connect a PS/2 keyboard to the DMX-R100, and power up the DMX-R100.
4. The BIOS start screen appears as shown below.

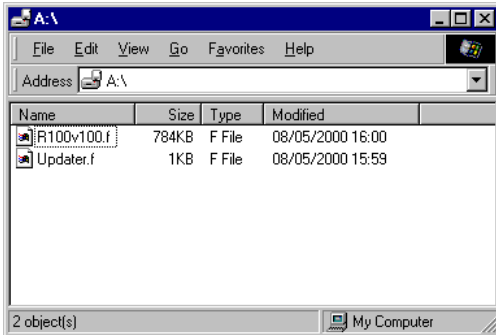

5. After a few seconds the start screen closes. When a flashing cursor/prompt appears in the top left corner of the screen, press the "ESC" key a few times until the blue screen below appears.

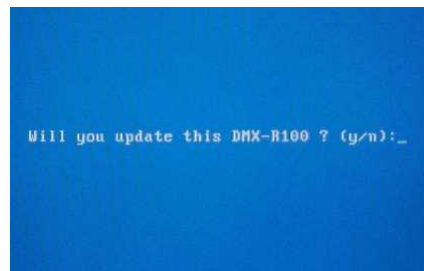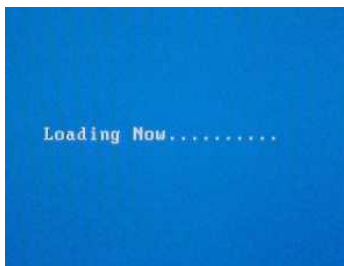

6. After a few seconds the message 'Will you Update DMX-R100 ? (y/n) ' should appear after a few seconds. Type 'y' to continue, and follow the instructions on the screen.

```
***** System Update *****

Insert the floppy disk including update files and press any

Finding update files....
Updating....
Tar: blocksize = 20
This Updater is for DMX-R100(from Ver1.00 to Ver1.01).
OK? (y/n):
```

7. 'Insert the floppy disk and press any key.'
8. 'This updater is ... ' OK?(y/n) Type 'y'.
9. The updater lists files as they are installed, installation takes a few minutes.

```
OK? (y/n):y
Updating....
Tar: blocksize = 20
x /home/apx397/bnp/bksc/auxs.bmp, 353078 bytes, 690 tape
x /home/apx397/bnp/bksc/chan.bmp, 392960 bytes, 768 tape
x /home/apx397/bnp/bksc/dyna.bmp, 353078 bytes, 690 tape
x /home/apx397/bnp/bksc/cqfl.bmp, 352960 bytes, 690 tape
x /home/apx397/bnp/bksc/fadr.bmp, 352960 bytes, 690 tape
x /home/apx397/bnp/bksc/lusr.bmp, 353078 bytes, 690 tape
x /home/apx397/bnp/bksc/menu.bmp, 44920 bytes, 88 tape bl
x /home/apx397/bnp/bksc/oviu.bmp, 353078 bytes, 690 tape
x /home/apx397/bnp/bksc/slot.bmp, 353078 bytes, 690 tape
x /home/apx397/bnp/bksc/TitleBar.bmp, 41078 bytes, 81 tap
x /home/apx397/bnp/bksc/osct.bmp, 353078 bytes, 690 tape
x /home/apx397/bnp/bksc/snap.bmp, 353078 bytes, 690 tape
x /home/apx397/bnp/bksc/auto.bmp, 353078 bytes, 690 tape
x /home/apx397/bnp/bksc/cues.bmp, 353078 bytes, 690 tape
x /home/apx397/bnp/bksc/keyb.bmp, 241078 bytes, 471 tape
```

10. Wait until you see the following message before removing the floppy disk.  
Update for Vx.xx completed.  
Remove your floppy disk and press any key ...
11. NOTE: If you notice any error messages during this procedure, or the update does not complete, switch off the DMX, remove the floppy disk, check the floppy disk and start the procedure again.
12. On successful completion, the DMX will automatically re-boot after a count down is displayed.  
To complete installation power off and power up again and allow the console to reboot the new software.